

R43C SERIES

High Voltage Relays

10kV SYSTEM VOLTAGE

Make & Break Load Switching



FEATURES


- Form C, SPDT
- Vacuum sealed ceramic
- Suitable for RF applications
- Tungsten contacts for load switching
- Mountable in any orientation
- Meets RoHS 2011/65/EU



PERFORMANCE

TABLE 1. SPECIFICATIONS	
CHARACTERISTIC	MEASURE
Contact Arrangement	Form C, SPDT (Single Pole Double Throw)
Max Operating Voltage (Peak, between Contacts and Contacts to Base) (Max Leakage Current: 15µA)	10 kV dc or 60Hz 7kV dc at 2.5 MHz 6kV dc at 16 MHz 4kV dc at 32 MHz
Test Voltage (Peak, between Contacts and Contacts to Base) (Max Leakage Current: 15µA)	11kV dc or 60Hz
Continuous Current, Max DC or 60Hz	25A
Continuous Current, Max 2.5 MHz	20A
Continuous Current, Max 16 MHz	13A
Continuous Current, Max 32 MHz	10A
Capacitance – Across Open Contacts	1.2 pF
Capacitance – Contacts to Ground	1.2 pF
Coil Hi-Pot (V RMS, 60Hz)	500V
Contact Resistance (Max)	0.02 ohm @ 1A
Operate Time (Max, incl bounce)	10ms
Release Time (Max)	10ms
Shock, Operating, 1/2 Sine, 11ms	50G
Vibration, Operating, Sine (55Hz-2,000Hz)	10G
Operating Temperature	-55°C to 125°C
Mechanical life	2,000,000 cycles
Weight	28 g
COIL (25° C)	MEASURE
Nominal Voltage (Vdc)	12 26.5
Pick-up Voltage, Max (Vdc)	8 16
Drop-out Voltage (Vdc)	0.5-5 1.0-10
Coil Resistance	70Ω 290Ω

PRODUCT DIMENSIONS [mm]

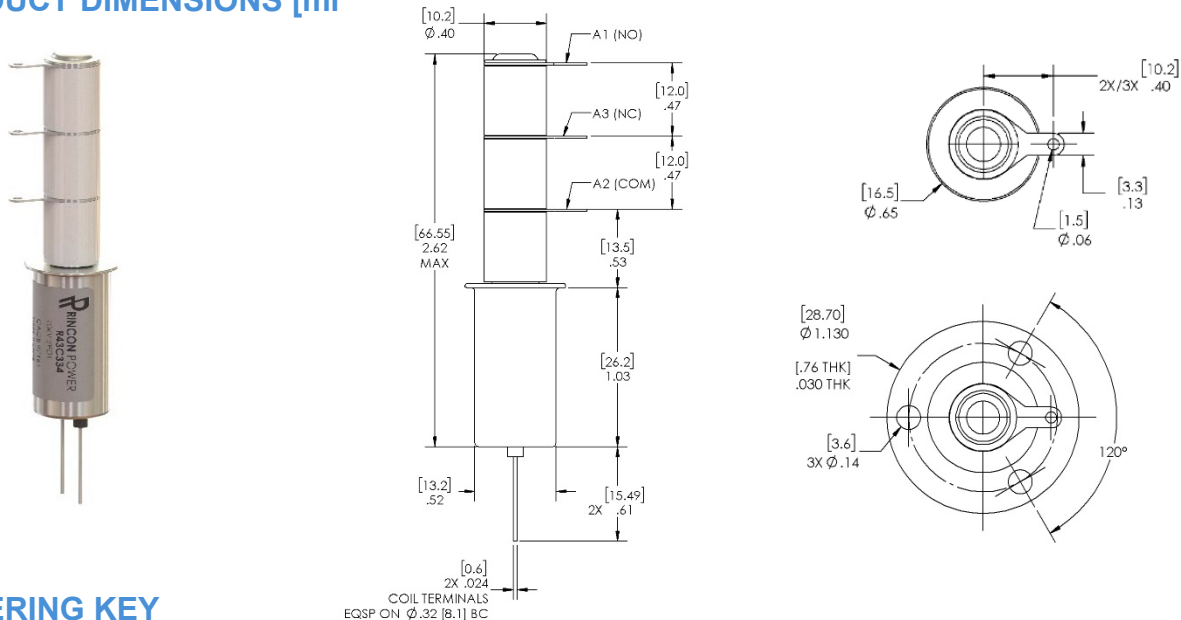

ORDERING KEY

TABLE 2. PRODUCT NOMENCLATURE			
Series	Coil	High Voltage Connection	Mounting
R43C	2 12Vdc Coil, Bus Wire	3 Solder Connection	2 3-Hole Flange
	3 26.5Vdc Coil, Bus Wire		4 Standard Flange

NOTES

- Relay is operated by a coil that changes resistance with temperature: Maximum coil voltage will be lower than indicated at temperatures above 25°C, and higher than indicated at temperatures below 25°C.
- Nominal Coil Voltage for Pick-up Current, Coil Current and Coil Power specifications, Current/Wattage will be lower than indicated at temperatures above 25°C and higher than indicated at temperatures below 25°C.
- Pick-up Voltage and Drop Out Voltage will be lower than indicated at temperatures below 25°C and higher than indicated at temperatures above 25°C.

Legal Disclaimer Notice for Rincon Power, LLC Datasheet

This legal disclaimer applies to purchasers and users of products manufactured by or on behalf of Rincon Power, LLC (“Rincon”). Unless otherwise expressly indicated in writing, Rincon’s products, product specifications and data sheets relating thereto are subject to change without notice. Users should check for and obtain the latest revision information and verify that such information is current and complete before placing orders for Rincon’s products. Users should always verify the actual performance of the Rincon’s products in their specific systems and applications.

Except as expressly set forth in the relevant purchaser order terms and conditions or applicable agreement, Rincon makes no warranty, representation or guarantee regarding the products, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose. To the maximum extent permitted by applicable law, Rincon disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

In no event shall Rincon be liable for any incidental or consequential damages resulting from the use, misuse or inability to use the product. This exclusion applies regardless of whether such damages are sought based on breach of warranty, breach of contract, negligence, strict liability in tort, or any other legal theory.